

EconoGrade

Affordable, Durable, Suits Huge Range of Applications




Standard Features

- Tipping Bucket
- Rear Lift
- Apron
- Ripper Bar - Rear Mounted
- Tilt Module
- Floatation Tyres
- Mast Hurdle
- Standard Cutting Edges
- Integrated Tie-Down and Lifting Points

Options

- Machine Control Packages
- Hydraulic Control Valve
- Ball Hitch
- Swivel Hitch
- PTO Pump

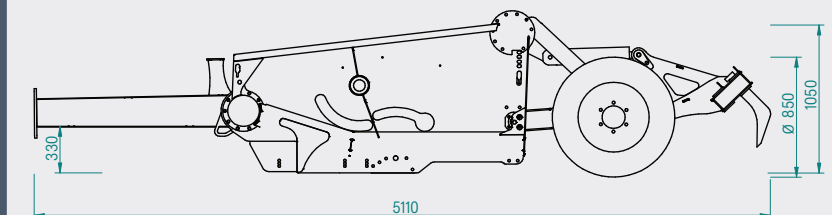

	EC22	EC25	EC28
Horsepower Range	75 - 120	85 - 130	95 - 140
Machine Width (mm)	2200	2500	2800
Cutting Width (mm)	1960	2270	2580
Length (mm)	4500		
Approx. Capacity (m³)	3.25	3.8	4.5



CELEBRATING **40 Years**

AUSTRALIAN MADE EARTHMOVING EQUIPMENT



Apron

- **Increases Load Carrying Capacity** - Allows For Longer Material Hauls
- **800mm Opening** - Easily Loads Material in Shorter Time
- **Unique Closing Action** - Less Force Required to Close Apron
- **Rigid Design** - Reduces Risk of Apron Damage from Solid Objects



Ripper Bar

- **Rear Mounted** - Enables Ripping with Maximum Down Force
- **Solid Box Construction** - Gives Peace of Mind when Ripping
- **Standard Shanks and Points** - Easy to Replace, Available Nationwide
- **Offset Pattern** - Reduces Build-up of Trash when Ripping



Tilt Module

- **Right Mounted** - Easily View Height Indicator from Seated Position
- **Wide Travel Range** - 75mm +/- Level, Allows for Steep Batters with Minimal Effort
- **Counterbalance Valve** - Prevents Hydraulic Creep
- **Multiple Control Options** - Manual or Automatic Control



Ball Hitch

- **70mm Ball and Cup Design** - CNC Machined for High Accuracy and Longevity
- **Includes Custom Drawbar** - Hardox™ 400, Increases Load Carrying Capacity
- **Easy to Attach** - Replaces Existing Drawbar
- **Allows Greater Flexibility of Movement** - Also Improves Operator Comfort

