

# AgriGrade

Irrigation Regrades and Dryland Drainage




## Standard Features

- Unique CamTrack Ejector
- Apron
- Ripper Bar - Front Mounted
- Tilt Module
- Walking Beam Axle - 10.0/7.5 - 15.3 Tryes
- Mast Hurdle
- Ladder and Handrail
- Standard Cutting Edges
- Integrated Tie-Down and Lifting Points
- Hose and Cylinder Protection
- Walking Beam Locking Pins

## Options

- Machine Control Package
- Hydraulic Control Valve
- Floatation Tyres
- Walking Beam Trye Upgrade - 12.5/80 - 15.3
- Ball Hitch
- Soft-Ride
- Shortened Drawbar - 1100mm length reduction

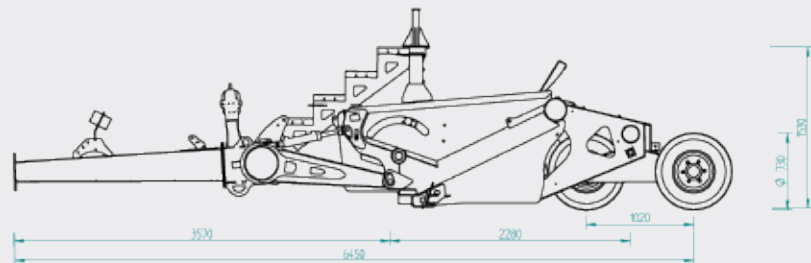

	AG28	AG33	AG38
Horsepower Range	110 - 180	130 - 260	160 - 280
Machine Width (mm)	2800	3300	3800
Cutting Width (mm)	2580	3090	3700
Length (mm)	7200		
Approx. Capacity (m <sup>3</sup> )	5.2	6.4	7.6



CELEBRATING **40 Years**

# AUSTRALIAN MADE EARTHMOVING EQUIPMENT



## Apron

- **Increases Load Carrying Capacity** - Allows for longer material hauls
- **800mm Opening** - Easily Loads Material in Shorter Time
- **Unique Closing Action** - Less Force Required to Close Apron
- **Rigid Design** - Reduces Risk of Apron Damage from Solid Objects



## Ripper Bar

- **Front Mounted** - Allows for Laser Controlled Ripping with Clear Line of Sight
- **Parallel Lift** - Control Depth While Maintaining Optimum Ripping Angle
- **Standard Shanks and Points** - Easy to Replace, Available Nationwide
- **Offset Pattern** - Reduces Build-up of Trash when Ripping



## Tilt Module

- **Right Mounted** - Easily View Height Indicator from Seated Position
- **Wide Travel Range** - 150mm from Level, Allows for Steep Batters with Minimal Effort
- **Counter Balance Valve** - Prevents Hydraulic Creep
- **Multiple Control Options** - Manual or Automatic Control



## Floatation Tyres

- **Greater Surface Area** - Reduces Compaction, Increases Load Carrying Capacity
- **Increased Maneuverability** - Turn Sharper While Under Load
- **8 Stud Hubs** - Greasable with Readily Available Parts Nationwide
- **Reduces Overall Length** - Easier to Transport